

Twist-Lock® Devices
15A, 277V AC, 2 Pole, 3 Wire Grounding
Insulgrip® Connector

HUBBELL

Features

- Individually molded face for each blade configuration
- Roomy wiring chamber provides ample space for wiring
- Ribbed nylon housing provides a secure grip that's impact and chemical resistant

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Insulgrip, corrosion resistant, yellow and white nylon.	.230"-.720" (5.8-18.3)	783585161204	HBL47CM79C

Listings

Listed to UL 498
Fed.Spec. W-C-596
Certified to CSA C22.2 No.42

Specifications


Housing / Cord Clamp	Nylon
Terminal Retainer	Clear polycarbonate
Contacts	Nickel Plated Brass
Terminal Screws	#10-32 Brass (Phillips / Slotted / Robertson)
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Stainless Steel

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accommodation	#16 AWG - #8 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
Environmental	
Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)



15A 277V AC
NEMA L7-15R
UL/CSA
2 HP

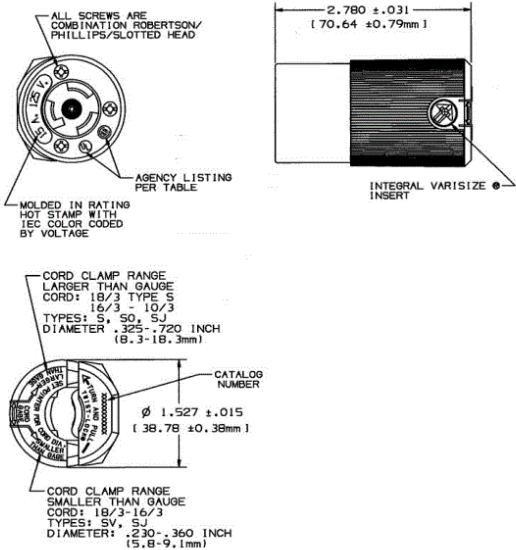

Accessories

Plug	HBL47CM70C
Weatherproof Boot	HBL60CM24
Flanged Inlet	HBL4786C

Resources

Customer Use Drawing
eCatalog

